

GREENSTONE DIGITAL LIBRARY INSTALLER'S GUIDE

Ian H. Witten and Stefan Boddie

Department of Computer Science
University of Waikato, New Zealand

Greenstone is a suite of software for building and distributing digital library collections. It provides a new way of organizing information and publishing it on the Internet or on CD-ROM. Greenstone is produced by the New Zealand Digital Library Project at the University of Waikato, and developed and distributed in cooperation with UNESCO and the Human Info NGO. It is open-source software, available from <http://greenstone.org> under the terms of the Gnu General Public License.

We want to ensure that this software works well for you. Please report any problems to greenstone@cs.waikato.ac.nz

Greenstone gsdl-2.50

March 2004

About this manual

This document explains how to install Greenstone so that you can run it on your own computer. It also describes how to obtain associated software that is freely available—the Apache Webserver and Perl. We have striven to make the installation procedure as simple as it possibly can be.

The software runs on different platforms, and in different configurations. Consequently there are many issues that affect (or might affect) the installation procedure. Section 1 mentions some questions that you will need to consider before installing Greenstone. Section 2 details the installation procedure for all the different versions; you need only read the part that relates to your operating system. Section 3 describes the demonstration digital library collections that are included in the distribution. Section 4 explains how to set up common web servers, Apache and Microsoft PWS/IIS, to work with Greenstone. Section 5 describes various Greenstone configuration options, and Section 6 shows how to make a personalized home page for your digital library installation. Finally, an Appendix 7 lists pieces of associated software and how to obtain them.

Companion documents

The complete set of Greenstone documents include five volumes:

- Greenstone Digital Library Installer's Guide (*this document*)
- Greenstone Digital Library User's Guide
- Greenstone Digital Library Developer's Guide
- Greenstone Digital Library: From Paper to Collection
- Greenstone Digital Library: Using the Organizer

Copyright

Copyright © 2002 2003 2004 2005 2006 2007 by the New Zealand Digital Library Project at the University of Waikato, New Zealand.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled “GNU Free Documentation License.”

Acknowledgements

The Greenstone software is a collaborative effort between many people. Rodger McNab and Stefan Boddie are the principal architects and implementors. Contributions have been made by David Bainbridge, George Buchanan, Hong Chen, Michael Dewsnip, Katherine Don, Elke Duncker, Carl Gutwin, Geoff Holmes, Dana McKay, John McPherson, Craig Nevill-Manning, Dynal Patel, Gordon Paynter, Bernhard Pfahringer, Todd Reed, Bill Rogers, John Thompson, and Stuart Yeates. Other members of the New Zealand Digital Library project provided advice and inspiration in the design of the system: Mark Apperley, Sally Jo Cunningham, Matt Jones, Steve Jones, Te Taka Keegan, Michel Loots, Malika Mahoui, Gary Marsden, Dave Nichols and Lloyd Smith. We would also like to acknowledge all those who have contributed to the GNU-licensed packages included in this distribution: MG, GDBM, PDFTOHTML, PERL, WGET, WWWARE and XLHTML.

Contents

1	Versions of Greenstone	1
2	The Installation Procedure	3
2.1	Windows	3
	Simple installation	
	Windows binaries	
	Windows webserver configuration (Web Library version only)	
	Windows source	
2.2	Unix	6
	Unix binaries	
	Unix source	
	Unix installation	
	Unix webserver configuration	
2.3	How to find Greenstone	8
	Local library (Windows only)	
	Web library (Windows and Unix)	
	The Collector	
	Administration	
2.4	The Greenstone Librarian Interface (GLI)	9
	Running under Windows	
	Running under Unix	
	Getting help	
	Compiling the Greenstone Librarian Interface	
2.5	Testing and troubleshooting	10
	Troubleshooting	
2.6	To learn more	11
3	Greenstone Collections	12
4	Setting up the Webserver	14
4.1	The Apache web server	14
	Setting up the Greenstone cgi-bin directory	
	The document root directory	
	Security	
4.2	The PWS and IIS web servers	16

5	Configuring your Site	18
5.1	File permissions	18
5.2	The gsdsite.cfg configuration file	18
6	Personalizing your Installation	20
6.1	Example	20
6.2	How to make it work	22
6.3	Redirecting a URL to Greenstone	22
	Appendix Associated Software	23
	Apache Webserver	23
	Perl	23
	GCC	23
	GDBM	23
	Java runtime environment	23
	Java compiler	23
	GNU Free Documentation License	25

Versions of Greenstone

The Greenstone software runs on different platforms, and in different configurations, as summarized in Figure 1.

Figure 1 The different options for Windows and Unix versions of Greenstone

There are many issues that affect (or might affect) the installation procedure. Before reading on, you should consider these questions:

- Are you using Windows or Unix?
- If Windows, are you using Windows 3.1/3.11 or a more recent version? Although you can view collections on 3.1/3.11 machines, and serve other computers on the same network, you cannot build new collections. The full Greenstone software runs on 95/98/Me, and NT/2000.
- If Unix, are you using Linux or another version of Unix? For Linux, a binary version of the complete system is provided which is easy to install. For other types of Unix you will have to install the source code and compile it. This may require you to install some additional software on your machine.
- If Windows NT/2000 or Unix, can you log in as the system “administrator” or “root”? This may be required to configure a webserver appropriately for Greenstone.
- Do you want the source code? If you are using Windows or Linux, you can just install binaries. But you may want the source code as well—it’s in the Greenstone distribution.
- Do you want to build new digital library collections? If so, you need to have Perl, which is freely available for both Windows and Unix.
- Is your computer running a webserver? The Greenstone software comes with a Windows webserver. However, if you are already running a Web server, you may want to stay with it. For Unix, you need to run a webserver.

2 Versions of Greenstone

- Do you know how to reconfigure your webserver? If you don't use the Greenstone webserver, you will have to reconfigure your existing one slightly to recognize the Greenstone software.

The Installation Procedure

Versions of Greenstone are available for both Windows and Unix, as binaries and in source code form. The Greenstone user interface uses a Web browser: Netscape Navigator or Internet Explorer (version 4.0 or greater in both cases) are both suitable. In case you don't already have a Web browser, Windows versions of Netscape are provided on the CD-ROM.

2.1 Windows

If you are a Unix user, please skip ahead to Section 2.2. For Windows users, if you want just a simple, straightforward installation, go through the following "simple installation" procedure. The Greenstone system occupies about 40 Mb of disk space.

If you choose anything other than the default setup, you will have to decide whether you want to install the binary code or the source code. If in doubt, choose the binary code. The installation procedure is the same for both. The following sections tell you more about the options you will be presented with.

When you've finished installation you should skip ahead to Section 2.3.


Simple installation

To install the Windows version from the CD-ROM, insert the disk into the drive (e.g. into *D:*). If the installation procedure does not start automatically after about 20 seconds, click on the *Start* menu, select *Run* and type *D:\setup.exe*, where "*D*" is the letter that identifies your CD-ROM drive. For Windows 3.1, select *Run* from the "File manager" and type *D:\Windows\win3.1\setup.exe*.

For the simplest installation, just accept the default at each point by clicking the *Next* button. That's all you need to do! Greenstone is installed in the directory *C:\Program Files\gsdl*.

Once installation is complete, to start your Greenstone system click on the *Start* button, open the *Program* menu, and select *Greenstone Digital Library*. This brings up a dialogue box: just click *Enter Library*. This automatically starts your Internet browser and loads the Greenstone Digital Library home page, which should look something like the example in Figure 2. You enter the Greenstone Demo collection by clicking on its icon.

Figure 2 Your Greenstone home page

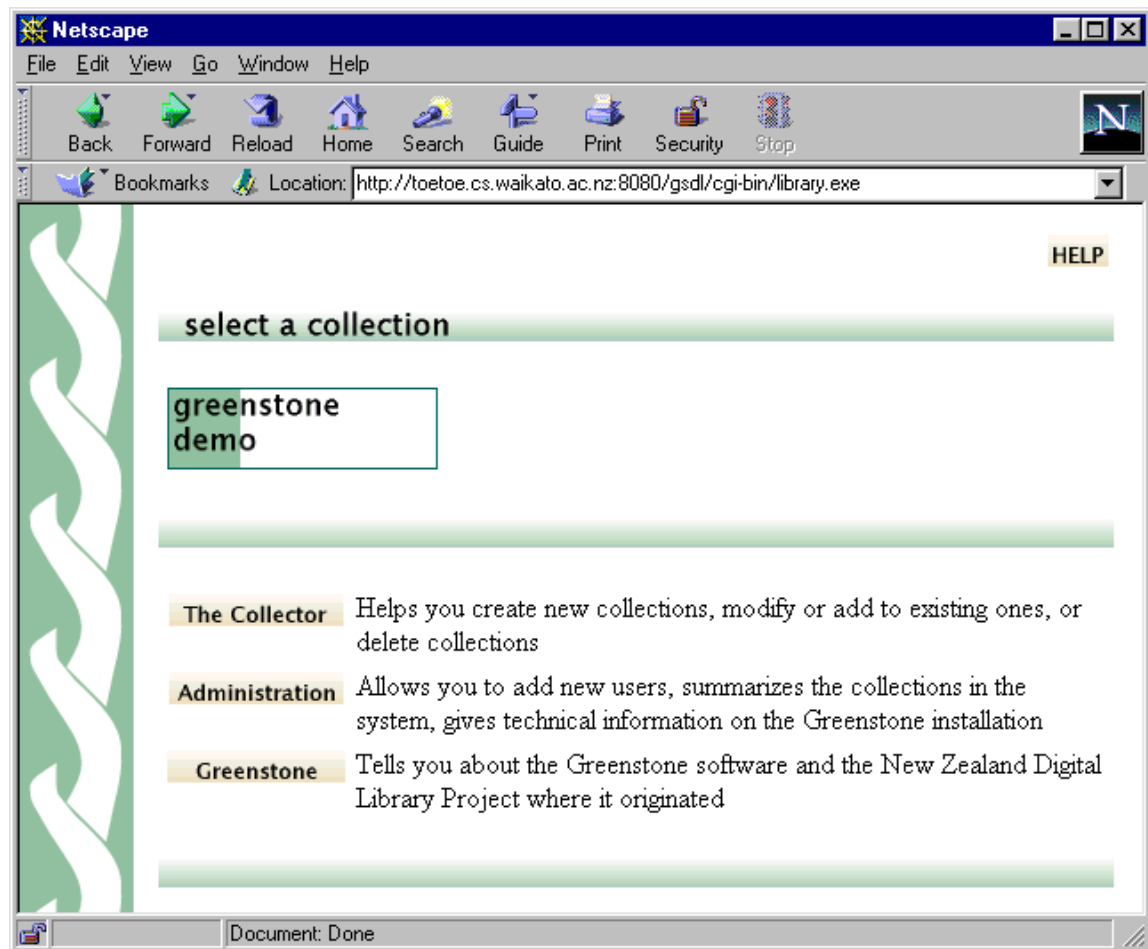

Windows binaries

There are two separate Windows binary programs on the CD-ROM: the *Local Library* and the *Web Library*. The default installation described above selects the Local Library version. We strongly recommend that you use this version. The Web Library, which is much harder to set up, is only necessary if you already run a web server and want to use it for Greenstone. Despite its modest name, the Local Library offers a complete, self-contained, web-serving capability.

Local Library. This enables any Windows computer to serve pre-built Greenstone collections. The Greenstone Demo collection will automatically be installed; you can also install the other collections on the CD-ROM (Section 3). The Local Library software is the same as that used on CD-ROMs produced by the Greenstone system.

The Local Library is intended for use on standalone computers or computers that do not already have webserver software. It contains a small built-in webserver so that other computers on the same network can also access the library. (However, the webserver has limited configurability.)

The Local Library software automatically determines whether your computer has network software installed or is connected to a network. It operates correctly under any

combinations of these conditions. However, there are two possible problems that may be encountered. Greenstone may

- cause an unwanted telephone dialup operation;
- fail to run because network software is installed, but installed incorrectly.

A restricted version of the Local Library is supplied which is intended for use in these situations. The restricted version only works with Netscape (not Internet Explorer). When you invoke the Local Library version of Greenstone, the dialogue box contains a button that allows you to use the restricted version instead. Unless the above problems arise, you should always use the standard version.

Web Library. This enables any computer with an existing webserver to serve pre-built Greenstone collections. As with the Local Library above, the Greenstone Demo collection will automatically be installed. You can also install the other collections on the CD-ROM (see Section 3).

The Web Library differs from the Local Library because it is intended for computers that already have webserver software.

To run the Web Library, you also need

- Webserver software. One possibility is Apache (see Appendix 7).
- **The Collector.** This component, which is included in both the Local Library and the Web Library, allows you to build collections containing material of your choice. (You will not be able to use the Collector on a Windows 3.1/3.11 machine.)

Windows webserver configuration (Web Library version only)

An advantage of the Local Library version of Greenstone is that it runs “out of the box” and does not require any special configuration. For the Web Library version, however, you will have to make some adjustments to your webserver setup.

If you already have a webserver, some small changes have to be made to its configuration to make your Greenstone installation operate. The install script explains what these are for the Apache webserver—see Section 4.2 for instructions for configuring the PWS and IIS web servers. You may need help from a system administrator to reconfigure an existing webserver—they should be able to understand the instructions printed by the install script.

If you do not already have a webserver, you will have to install one. (See the Appendix 7 for information on the Apache webserver.) Then you will have to configure it appropriately. Section 4 gives a detailed account of the parts of a webserver installation that affect Greenstone, and how they need to be altered. It comes down to including half a dozen or so lines in a configuration file.

Windows source

The Greenstone source code occupies 50 Mb of disk space, but to compile it you will

need about 90 Mb. To compile the source on Windows you need

- The Microsoft Visual C++ compiler. (We are currently sorting out some minor problems in compiling Greenstone with various Windows ports of GNU GCC.)

(You do not need GDBM, the Gnu database manager, because it is included in the Greenstone source distribution.)

It is unlikely that you will be able to compile Greenstone on a Windows 3.1/3.11 machine.

In the event that you recompile Greenstone and wish to use the recompiled version to create CD-ROMs, you should note that code produced by recent versions of the Visual C++ compiler does not run under Windows 3.1/3.11, although there is no problem with later Windows systems (95, 98, Me, NT, 2000). If you want your CD-ROMs to operate on early Windows machines, you will need a different version of the compiler. Moreover, Greenstone uses STL, the C++ standard template library, and although these compilers sometimes come with STL, the provided version does not always work properly. Hence to recompile Greenstone in such a way that it produces CD-ROMs that work on early versions of Windows, you need

- The Microsoft Visual C++ compiler, Version 4.0 or 4.2.
- An external version of STL, the C++ standard template library. STL is packaged with Greenstone for use with these compiler versions.

Note that the Windows installation procedure does not attempt to compile Greenstone for you if you choose to install the source code. For platform- and compiler-specific instructions on compiling Greenstone, see the *Install.txt* document which is placed in the top-level Greenstone directory (*C:\Program Files\gsdl* by default) during the installation procedure.

2.2 Unix

This section is written for Unix users. (Windows users should skip ahead to Section [2.3](#).) You need to choose whether to install the binary code or the source code. The binary code occupies about 50 Mb of disk space; the source code requires about 160 Mb to compile.

Unix binaries

The binary code requires an Intel x86-based Linux distribution which includes ELF binary support. Distributions that meet these requirements include:

- RedHat 5.1
- SuSE Linux 6.1
- Debian 2.1
- Slackware 4.0

More recent versions of these distributions should also work.

You will need a webserver: we recommend Apache. We also strongly recommend you to install your webserver *before* installing Greenstone—this will make it much easier to answer the questions that are asked during the Greenstone installation procedure. If you want to build new digital library collections, you will also need Perl if this is not already on your system. To check, open a terminal window, type `perl -v`, and see if a message appears specifying, amongst other things, the version number. For most versions of Linux, Perl is installed by default. The Appendix 7 gives information on how to obtain Apache and Perl.

Unix source

The source code is the same for Unix as for Windows. It has been compiled and tested on Linux, Solaris, and Macintosh OS/X; it should be a fairly routine matter to port it to other flavors of Unix.

To compile the Greenstone source code on Unix, you need

- GCC, the Gnu C++ compiler.
- GDBM, the Gnu database manager.

To run the Greenstone software, you also need a Web server and Perl, as described above under *Unix binaries*.

Unix installation

To install the Unix version from the CD-ROM, insert the disk into the drive, and type

<code>mount /cdrom</code>	mount the CD-ROM device (this command may differ from one system to another; for example on OS/X you <code>cd</code> to the <code>/Volumes</code> directory and then to the appropriate subdirectory for the CD-ROM)
<code>cd /cdrom</code>	change directory to the CD-ROM's top level
<code>cd Unix</code>	change directory to where the Unix install script resides
<code>sh Install.sh</code>	begin the installation process (an explicit <code>sh</code> is used because many installations forbid you to execute programs directly from CD-ROM)

The final command begins an interactive dialogue which requests the information that is needed to install Greenstone on your system, and gives detailed feedback on what is happening.

The installation procedure begins by asking you which directory to install Greenstone into. The first file placed there is the “uninstall” program that cleans up any partial installation, should you encounter problems or terminate the installation prematurely. Next you choose whether you want to install binaries or source code. You are then asked some questions about your webserver setup. You need to have a valid cgi executable directory (normally called “cgi-bin” on Unix systems); you can either create a

new one or use your existing one. If you create a new one, you will need to enter this information in your webserver's configuration file. In either case you need to enter the web address of the cgi directory. The installation dialogue will guide you through all these choices. It is important to set the file permissions correctly on certain directories, and you are prompted for the necessary information. Finally, you are prompted for a password for the "administrator" user *admin*.

By default, all Greenstone software is installed in the directory */usr/local/gsd1* if it is the root user who is doing the installation, and into the directory *~/gsdl* otherwise (where "~" is the user's home directory).

Installing the binaries takes just a few minutes, enough time for you to answer the appropriate questions. If you install the source code, the installation script will compile it, which takes from ten minutes to an hour or so, depending on the speed of your processor.

To uninstall the software, type

```
cd ~/gsdl
```

or */usr/local/gsd1* if it was the root user who installed Greenstone

```
sh Uni nstall.sh
```

During the installation procedure you will be asked whether you want to install any Greenstone collections. The Greenstone Demo collection is installed automatically; other collections on the CD-ROM are described in Section 3.

Unix webserver configuration

If you already have a webserver, some small changes will have to be made to its configuration to make your Greenstone installation operate. The install script explains what these are. You will probably need help from your system administrator to reconfigure the webserver—he or she should be able to understand the instructions output by the install script. For your convenience, the output of the install script is written to a file called *INSTALL_RECORD* in the directory into which you installed Greenstone.

If you do not already have a webserver, you will have to install one. The Appendix 7 gives information on Apache. Then you will have to configure it appropriately. Section 4 gives a detailed account of the parts of an Apache webserver installation that affect Greenstone, and how they need to be altered. It comes down to including half a dozen or so lines in a configuration file.

You do not need to be the Unix "root" user to go through the installation procedure above. When it comes to configuring an existing Apache server, however, you may need "root" privileges—it all depends on how Apache is set up. If you install Apache yourself, you can do it as a user without "root" privileges. If you need to work your way around an uncooperative system administrator, you can always install a second Apache webserver on your computer—even if one exists already.

2.3 How to find Greenstone

Local library (Windows only)

If you are using the Local Library, simply run the *Greenstone* program from the *Start* menu. This automatically opens a dialog box that starts your Internet browser and loads the Greenstone Digital Library home page. The Greenstone Demo collection should be accessible from this page. The dialog box contains a *File* menu item that allows you to change the default browser used by Greenstone. It doesn't matter whether you use Netscape or Internet Explorer, except that if you are running on Windows 2000, we recommend that you use Internet Explorer.

Web library (Windows and Unix)

If you are using the Web Library, once you have installed the software and configured the webserver, use this URL to enter your Greenstone system:

http://localhost/gsd/cgi-bin/library

The Greenstone Demo collection should be accessible from this page.

The Collector

A link to the Collector is provided on the digital library home page.

Administration

A link to the Administration pages is provided on the digital library home page. The "administrator" user is called *admin*, with a password that you specified during the installation process. The administrator is authorized to add new users, and to build collections.

2.4 The Greenstone Librarian Interface (GLI)

The Greenstone Librarian Interface (GLI) is a tool to assist you with building digital libraries using Greenstone. It gives you access to Greenstone's collection-building functionality from an easy-to-use "point and click" interface.

GLI is installed automatically with all distributions of Greenstone. It is placed in the subdirectory *gli* of the top-level Greenstone directory (*C:\Program Files\gsd\gli* by default). Note that it runs in conjunction with Greenstone and will not work properly unless it is placed in a subdirectory of your Greenstone installation. If you have downloaded one of the Greenstone distributions, this will be the case.

To use the GLI, your computer needs to have the Java Runtime Environment. If it doesn't, the installer will offer to install a version that is included on the CD-ROM. On Unix, you will also need to ensure that Perl is installed (for Windows, Perl is already included in the Greenstone software). Please report any problems you have running or using the Librarian Interface to greenstone@cs.waikato.ac.nz.

Running under Windows

To run GLI under Windows, browse to the *gli* folder in your Greenstone installation (e.g. using Windows Explorer), and double-click on the file called *gli.bat*. This file checks that Greenstone, the Java Runtime Environment, and Perl are all installed, and starts the Greenstone Librarian Interface.

Running under Unix

To run GLI under Unix, change to the *gli* directory in your Greenstone installation, then run the *gli.sh* script. This script checks that Greenstone, the Java Runtime Environment, and Perl are all installed and on your search path, and starts the Greenstone Librarian Interface.

Getting help

The Greenstone Librarian Interface has extensive on-line help facilities. You get help by clicking the *Help* button at the top right of the screen. This opens up the text to a section that relates to what you are doing—which of the GLI panels you are on. You can click around the help text to learn what you need to know. Use it.

Compiling the Greenstone Librarian Interface

If you have downloaded the Greenstone source distribution, you will have the Java source code of the Librarian Interface. To compile it, your computer needs to have a Java Development Kit. The Appendix 7 gives information on how to obtain this. To compile the source code, run the *makegli.bat*(Windows) or *makegli.sh*(Unix) files. Once compiled, you can run GLI as described above.

2.5 Testing and troubleshooting

To test Greenstone, point your Web browser at the Greenstone home page and explore the Demo collection and any other collections that you have installed. Don't worry—you can't break anything. Click liberally: most images that appear on the screen are clickable. If you hold the mouse stationary over an image, most browsers will soon pop up a message that tells you what will happen if you click. Experiment! Choose common words like “the” and “and” to search for—that should evoke some responses, and nothing will break. For more information, see the *Greenstone Digital Library User's Guide*.

Troubleshooting

	Problem	Try this
Local Library (Windows only)	When I start Greenstone my computer asks me to dial up my Internet Service Provider.	Push the <i>Cancel</i> button in the dialog box. This usually solves the problem.
	When I start Greenstone my computer <i>still</i> asks me to dial up my Internet Service Provider.	Choose the “Restricted version” when you run Greenstone. This version only works with Netscape.

	When I point my browser at the digital library, it can't find that page.	Check your Internet Proxy settings and turn proxies off (use <i>Edit preferences</i> on Netscape or <i>Internet options</i> on Explorer).
	The Collector seems to be working very slowly!	Are you using Netscape under Windows 2000? If so, try using Internet Explorer instead—on Windows 2000 (only) there seems to be some incompatibility with Netscape.
Web Library (Windows and Unix)	When I start Apache, it quits immediately.	Add a <i>ServerName localhost</i> directive to the Apache configuration file (see Section 4.1).
	When I point my browser at the digital library, it displays garbage—a binary file.	Check the <i>ScriptAlias</i> directive in the Apache configuration file, making sure it comes before the <i>Alias</i> directive (see Sections 4.2 and 4.3).
	I get the Greenstone home page (Figure 2), but the Demo collection icon does not appear.	Run the program <i>library</i> (in the cgi-bin directory) from the DOS (or shell) prompt to generate debugging information that will help you locate the problem.
Both versions	When I point my browser at the digital library, it can't find that page.	Try using 127.0.0.1 in place of <i>localhost</i> . This reserved IP number is defined to be a “loopback” to your local computer.
	My browser complains that it can't find <i>main.cfg</i> .	Check that the Greenstone files exist and are world-readable. If you are using the Web library, try running the <i>library</i> program from the command line. If it runs OK, the problem is with file permissions (see Section 5.1). If not, the <i>gsdlhome</i> variable is probably set incorrectly in the <i>gsdlsite.cfg</i> configuration file (see Section 5.2).
	I'm having trouble using the Collector.	Read the <i>Greenstone Digital Library User's Guide</i> , Section .
	I've added a new user but they can't seem to log in.	Check that the directory <i>C:\Program Files\gsdl\etc</i> and all its contents are globally writeable (see Section 5.1).

2.6 To learn more

To learn more about the innards of your Greenstone installation, consult the *Greenstone Digital Library Developer's Guide*. It includes (for example) details of the directory structure that has been created, and information about how to configure your Greenstone site.

Greenstone Collections

Several demonstration Greenstone collections are included on the CD-ROM. If you have Web access, many others can be downloaded, in either pre-built or unbuilt form, from the New Zealand Digital Library Project website (nzdl.org).

The Greenstone Demo collection is a small subset of the Humanity Development Library (HDL), a polished collection. It illustrates that relatively rich browsing capabilities can be provided (so long as suitable metadata is available). It is included automatically when the software is installed.

Greenstone also comes with some well-documented example collections whose “about” page describes how they are constructed. They demonstrate various capabilities of Greenstone. The install dialogue will ask you whether you want to include them in your Greenstone installation; the approximate amount of disk space needed for each collection is shown below.

13 Greenstone Collections

<i>demo</i>	Greenstone Demo (7 Mb)	A small subset of the HDL. If you clone this collection, the full facilities will only appear if your new files provide appropriate metadata information.
<i>dls-e</i>	Development Library Subset collection (150 Mb)	Like the Greenstone Demo, this is a subset of the HDL—but much larger. It contains 250 publications—books, reports and magazines—in various areas of human development (the full HDL contains 1,230 publications). It has the same structure as the Greenstone Demo. It's fairly complex, and if you're just starting out you might prefer to look at some other collections first (e.g. <i>MSWord and PDF demonstration</i> , the <i>Greenstone Archives</i> , or the <i>Simple image collection</i>).
<i>wrdpdf-e</i>	MSWord and PDF demonstration (4 Mb)	This contains a few documents in PDF, MSWord, RTF, and Postscript formats, demonstrating the ability to build collections from documents in different formats. The collection configuration file is very simple.
<i>gsarch-e</i>	Greenstone Archives collection (5 Mb)	A collection of email messages from the Greenstone mailing list archives, this uses the Email plugin, which parses files in email formats. The collection configuration file is very simple.
<i>cltbib-e</i>	Bibliography collection (7 Mb)	With about 4,000 bibliography entries, this collection incorporates a form-based search interface that allows fielded searching. It is fairly complex.
<i>cltext-e</i>	Bibliography supplement (1 Mb)	This tiny collection of 10 bibliography entries illustrates the "supercollection" facility which searches several collections together, seamlessly. It operates together with the <i>Bibliography</i> collection, and its configuration file is almost the same.
<i>MARC-e</i>	MARC example (1 Mb)	Based on some MARC records from the Library of Congress, this is a simple collection (and does not allow form-based searching).
<i>oai-e</i>	OAI demo collection (18 Mb)	Using the Open Archive Protocol and the <i>Import-From</i> feature, this retrieves metadata from an archive and builds a collection from the records. In this case they are images, so both the OAI and Image plugins are used.
<i>image-e</i>	Simple image collection (1 Mb)	This very basic image collection contains no text and no explicit metadata—which makes it rather unrealistic. The configuration file is about as simple as you can get.
<i>authen-e</i>	Formatting and authentication demo (8 Mb)	With the same material as the original Greenstone demo collection, this shows off two independent features: non-standard document formatting, and controlled access to the documents via user authentication.
<i>garish</i>	Garish version of demo collection (8 Mb)	This collection also contains the same material as the Greenstone demo. Its appearance has been altered to show how the pages generated can be set out differently. It relies on a non-standard macro file that is supplied with Greenstone.
<i>isis-e</i>	CDS/ISIS example (1 Mb)	This collection is built from a CDS/ISIS database of about 150 bibliography entries. It uses the ISISPlug plugin, which reads the standard ISIS .mst and .fdt files and converts them to Greenstone metadata.

Setting up the Webserver

In this section we describe how to set up your webserver to work with Greenstone. Note that all this is unnecessary when using the Windows Local Library, because this software works “out of the box” and does not require a webserver.

We discuss both the Apache webserver, which is freely available for both Windows and Unix (see the Appendix 7 for details) and Microsoft's Personal Web Server (PWS) and Internet Information Services (IIS) webserver. PWS is the standard Microsoft server for Windows 95/98; IIS is the standard webserver for Windows 2000 and the forthcoming Windows XP ; Windows NT can use either. The Apache description applies equally to the Windows Web Library and Unix versions (though we use Windows-style terminology and pathnames); the PWS/IIS section applies only to the Windows Web Library.

Once you have installed your webserver, the next step is to install Greenstone. We will assume that during the install procedure you have taken the default action for each stage by clicking on the *Next* button. The result is that the directory *C:\Program Files\gsdl* is created and the Web Library binary is stored there, along with some supporting files.

All webserver use the special URL “localhost” to denote the computer that the webserver is running on. Thus when you install a webserver, you can get at your html documents by typing the URL *http://localhost* into a browser. If your computer has a domain name set up, this is used instead of localhost to identify your computer from remote sites. Thus on the New Zealand Digital Library's computer, *http://nzdl.org* and *http://localhost* are equivalent. If you type *http://nzdl.org* on your computer you will get the New Zealand Digital Library webserver, whereas if you type *http://localhost* you will get your own computer's webserver.

4.1 The Apache web server

The Apache webserver is usually installed in *C:\Program Files\Apache Group\Apache* and is configured so that the cgi-bin directory is in the subdirectory *cgi-bin* and the document root is the subdirectory *htdocs*. It is reconfigured by editing the configuration file *C:\Program Files\Apache Group\Apache\conf\httpd.conf*. This is a text file: it's quite easy to read it to see how things are set up.

Depending on how your computer's networking software is set up, you may have to add this line to Apache's *httpd.conf* configuration file:

```
ServerName localhost
```

If this line is not included, the system attempts to find your server's name. However, there are bugs in some versions of Windows that cause this to fail. In this case, Apache will exit immediately when you start it up. It does display an error message, but it is immediately erased and you probably can't read it.

Setting up the Greenstone cgi-bin directory

Cgi-bin is a directory from which the webserver treats documents as executable

programs. Apache's *ScriptAlias* directive is used to create a cgi-bin directory. Note that this directive can make any directory a cgi executable directory—it doesn't have to be called “cgi-bin”! Conversely, a directory called “cgi-bin” isn't special unless *ScriptAlias* has been applied to it.

When installed, Apache has a cgi-bin directory of *C:\Program Files\Apache Group\Apache\cgi-bin*. This means that if presented with the URL *http://localhost/cgi-bin/hello*, the webserver will attempt to execute a file called *hello* from within the above directory.

There is one Greenstone program, which is called “library.exe”, that needs to be executed by the webserver; it in turn reads a file called the Greenstone site configuration file, or “gsdlsite.cfg”, which needs to be located in the same directory.

The best way of arranging this is to use Apache's *ScriptAlias* directive to create a new cgi-bin directory. Here's the excerpt from Apache's *httpd.conf* configuration file that adds *C:\Program Files\gsdl\cgi-bin* as an additional cgi-bin directory:

```
ScriptAlias /gsdl/cgi-bin/ "C:/Program Files/gsdll/cgi-bin/"
<Directory C:/Program Files/gsdll/cgi-bin>
Options None
AllowOverride None
</Directory>
```

(It's a curious fact that Apache configuration files use forward slashes in place of standard Windows backslashes.)

This means that any URLs of the form *http://localhost/gsdll/cgi-bin...* will be sought in the directory *C:\Program Files\gsdl\cgi-bin*, and executed by the web server. For example, if presented with the URL *http://localhost/gsdll/cgi-bin/hello*, the web server will attempt to retrieve the file *C:\Program Files\gsdl\cgi-bin\hello* and execute it. However, the URL *http://localhost/cgi-bin/hello* looks in Apache's regular *cgi-bin* directory for the file *C:\Program Files\Apache Group\Apache\cgi-bin\hello* and executes it, just as it did before.

The document root directory

The document root directory is the root of your webserver's directory structure. When installed, Apache has a document root of *C:\Program Files\Apache Group\Apache\htdocs*. This means that if presented with the URL *http://localhost/hello.html*, the webserver will attempt to retrieve a file called *hello.html* from within the above directory.

Several files within Greenstone need to be read by the webserver. The simplest way to arrange this is to use the *Alias* directive, which is just like *ScriptAlias* except that it applies to ordinary web pages, not cgi scripts. Insert these lines into your Apache configuration file, after the *ScriptAlias* directive, to add *C:\Program Files\gsdl* as an additional place to look for documents.

```
Alias /gsdl/ "C:/Program Files/gsdll/"
<Directory C:/Program Files/gsdll/>
Options Indexes MultiViews FollowSymLinks
AllowOverride None
Order allow,deny
Allow from all
</Directory>
```

This means that any URLs that match the first argument of `Alias` (`gsdl`) are sought as files in the place corresponding to the second argument. In other words, URLs of the form `http://localhost/gsdl/...` will be sought as files in the directory `C:\Program Files\gsdl`. For example, if presented with the URL `http://localhost/gsdl/hello.html`, the webserver will attempt to retrieve the file `C:\Program Files\gsdl\hello.html`. However, the URL `http://localhost/hello.html` looks in the regular `htdocs` directory for the file `C:\Program Files\Apache Group\Apache\htdocs\hello.html`, just as it did before.

Be sure to add the `Alias` directive after the `ScriptAlias` directive. Instructing Apache to alias `/gsdl` before `/gsdl/cgi-bin` would match the URL `/gsdl/cgi-bin/library` against the `Alias` directive rather than the `ScriptAlias`, and it would be interpreted as a request for a document rather than the result of executing a program. The outcome would be to “display” the binary program file as a page in the Web browser, instead of executing it.

Security

You should be aware that if the web library version of Greenstone is set up as instructed above, anyone will be allowed to download any file in the `gsdl` directory structure. This includes the index files and source documents of any collections you make, the user database, usage logs, etc.

If you are concerned about this, you can easily tighten up your webserver configuration to improve security. For the Apache webserver, put these lines into the configuration file instead of those given in the previous subsection:

```
Alias /gsdl/ "C:/Program Files/gsd1/"
<Directory "C:/Program Files/gsd1">
Order allow,deny
Deny from all
<FilesMatch
"\.(gif|jpe?g|png|css|mov|mpeg|ps|pdf|doc|rtf|jar|class)$">
Order allow,deny
Allow from all
</FilesMatch>
</Directory>
```

This means that only files whose extensions match the regular expression in the `FilesMatch` line may be downloaded.

4.2 The PWS and IIS web servers

Although neither PWS nor IIS is installed by default on current Windows systems, they can easily be installed using the “Add/Remove programs” control panel . If they are not already on your Windows distribution CD-ROM you will have to download them from the Microsoft web site (www.microsoft.com).

The setup procedure for Greenstone is identical for both PWS and IIS. Invoke the Personal Web Manager and perform the following actions.

1. Select *Advanced* to get the *Advanced Options* screen.
2. Select *Home* and click *Add* Fill out the fields as follows:

Directory field: `C:\Program Files\gsdl`
Alias field: `gsdl`

Access permissions: *Read*

Application permissions: *None*

Click *OK*

This makes Greenstone files accessible to the webserver.

3. Back in *Advanced Options*, select *gsdl* and click *Add* Fill out the fields as follows:

Directory field: *C:\Program Files\gsdl\cgi-bin*

Alias field: *cgi-bin*

Access permissions: *None*

Application permissions: *Execute*

Click *OK*

This allows the Greenstone program *library.exe* to be executed by the webserver.

4. Go to the URL *http://localhost/gsd/cgi-bin/library.exe*

Note: you need to specify the *.exe* file extension with PWS and IIS.

Configuring your Site

For Greenstone to work properly, access permissions for certain files must be set up appropriately. Also, there is a configuration file associated with each Greenstone site. The install procedure creates a generic configuration file based on your installation choices; however its contents can be tailored to cope with different situations. This section explains both of these issues.

5.1 File permissions

This section is irrelevant for Windows 95/98, because these systems don't identify the owners of files.

On Windows NT, 2000 and Unix systems, cgi scripts don't run as normal users, because users can't be identified over the Web. Instead, they run as the user who started up the webserver program (on Windows systems), or as a special user (commonly called *nobody* on Unix systems). Because of this, all files and directories within *C:\Program Files\gsdl* need to be globally readable (or at least readable by the cgi-script user, perhaps "*nobody*"). To test whether file permissions are set up correctly, run the program *library.exe* from the command line. If the files are in the right places but the permissions are set incorrectly, it will run from the command line—that is, when *you* execute it—but not from a browser—that is, when the "*nobody*" user executes it. Another test is to log in as another user to see if the file permissions are specific to your original user account.

To work through a Web browser, all the Greenstone directories must be globally readable. Also, the *C:\Program Files\gsdl\etc* directory and all its contents must be globally *writable*. This is the directory into which the library program writes the usage log, error and initialization logs, and various user databases. If you're reluctant to make this directory globally writable, you can set permissions so that just the files *errout.txt*, *initout.txt*, *key.db*, *users.db*, *history.db* and *usage.txt* are writable by the cgi user.

If file permissions are not set up correctly for *C:\Program Files\gsdl\etc*, you may find that user authentication and search history do not work, and that no usage log (*usage.txt*) is generated.

5.2 The gsdl site configuration file

The install procedure creates a generic Greenstone site configuration file based on your installation choices. For our installation this file is *C:\Program Files\gsdl\cgi-bin\gsdl site.cfg* and its content is:

```
# Site configuration file for Greenstone.
# Lines beginning with
# are comments.
# This file should be placed in the same directory as your library
# executable file. it should be edited to suit your site.
# points to the GSDLHOME directory
gsdlhome "C:/Program Files/gsdL "
# this is the http address of GSDLHOME
# if your webserver's DocumentRoot is set to $GSDLHOME
# then httpprefix can be commented out
httpprefix /gsdl
# this is the http address of the directory which
```

```

# contains the images for the interface.
httpimg /gsdl/images
# should contain the http address of this cgi script. This
# is not needed if the http server sets the environment variable
# SCRIPT_NAME
#gwcgi /cgi-bin/library
# maxrequests is the most requests a fastcgi process
# will serve before it exits. This can be set to a
# low figure (like 1) while debugging and then set
# to a high figure (like 10000) when everything is
# working well.
#maxrequests 10000

```

You can customise your installation by editing this file, although you will probably not need to do so.

The *gsdlhome* line simply points to the *C:\Program Files\gsdl* directory.

httpprefix is the web address of the directory that Greenstone is installed in. We explained earlier how to create an alias so that URLs of the form *http://localhost/gsdl/...* are sought in the *C:\Program Files\gsdl* directory. Putting a line *httpprefix/gsdl* into the *gsdl/site* configuration file establishes the same convention for the Greenstone software.

httpimg is the web address of the *C:\Program Files\gsdl/images* directory, which contains all the gif images used in the interface. In any standard Greenstone installation this will always be *httpprefix/images*, and the line in the file above is left untouched.

gwcgi is the web address of the library cgi program. This is not required by most web servers (including Apache), and should remain commented out. Don't uncomment it unless you're sure you need to, because that may introduce problems.

maxrequests is only used by versions of Greenstone that are compiled with the "fast-cgi" option on. The standard binary distribution does not include this option because not all web servers are configured to support it. Fastcgi speeds up cgi executions by keeping the main executable in memory between invocations of the software, rather than loading it in from disk each time a web page is requested from the Greenstone software. The trade-off is the amount of memory used, which can grow the longer the program remains in memory. Once *maxrequests* pages have been generated, the cgi program quits, thereby freeing any accumulated memory. To respond to the next request for a Web page, the cgi program is read in from disk again, and a new cycle of page requests is begun. Most installations use the standard cgi protocol, which means that *maxrequests* can be safely ignored.

Personalizing your Installation

Probably the first thing you will want to do once your Greenstone installation is up and running is personalize the home page. The file that generates the Greenstone home page is called *home.dm*, and is located in the *macros* subdirectory of the directory into which you installed Greenstone. (The default for Windows systems is *C:\Program Files\gsdl*.) This is a plain text file that you will have to edit to create a new home page. Instead of editing it, we recommend creating a new file, say *yourhome.dm*. This will be like *home.dm* but will define “package home”—which is the bit that does the actual work—in a different way.

When you make a different home page, there must be some way of linking in to the digital library pages so that you can search and browse the collections on your system. The solution that Greenstone adopts is to use “macros”. That’s why the home-page file is called “.dm” and not “.html”—it’s a “macro” file rather than a regular html file. But don’t quail: the macro file basically contains just html, sprinkled with a few mystical incantations which are explained below. The macro language is a powerful facility, and only a small part of it is described below—see the *Greenstone Digital Library Developer’s Guide* for more information.

6.1 Example

Figure 3 Your own Greenstone home page

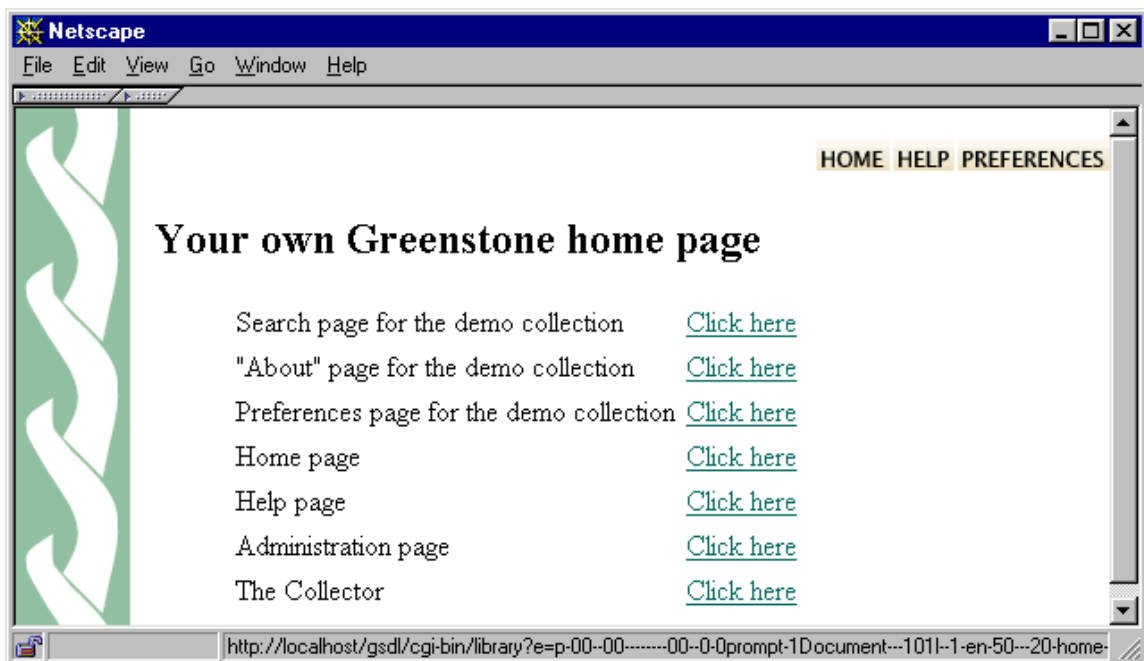


Figure 3 shows an example of a new digital library home page. Each of the “Click here” links takes you to the appropriate Greenstone facility. This page was generated by the file called *yourhome.dm* shown in Figure 4.

Figure 4 *yourhome.dm* used to create Figure 3

```

package home
_content_ {
<h2>Your own Greenstone home page</h2>
<ul>
<table>
<tr valign=top><td>Search page for the demo
collection<br></td>
<td><a href="_httpquery_&c=demo">Click here</a></td></tr>
<tr><td>"About" page for the demo collection</td>
<td><a href="_httppageabout_&c=demo">Click
here</a></td></tr>
<tr><td>Preferences page for the demo collection</td>
<td><a href="_httppagepref_&c=demo">Click
here</a></td></tr>
<tr><td>Home page</td>
<td><a href="_httppagehome_">Click here</a></td></tr>
<tr><td>Help page</td>
<td><a href="_httppagehelp_">Click here</a></td></tr>
<tr><td>Administration page</td>
<td><a href="_httppagestatus_">Click here</a></td></tr>
<tr><td>The Collector</td>
<td><a href="_httppagecollector_">Click
here</a></td></tr>
</table>
</ul>
}
# if you hate the squirly green bar down the left-hand
side of the
# page, uncomment these lines:
# _header_ {
# }

```

You can use Figure 4 as a template for creating your own specialized Greenstone home page. Basically, it defines a macro called *content*. Inside the curly braces is ordinary html. You could insert additional text, along with any html formatting commands, to put the content that you want to see on the page. The text is regular html; if you want you can include hyperlinks and use all the other facilities that html provides.

To make your new home page link in with other digital library pages, you need to use an appropriate magic spell. In this macro language, magic spells are words flanked by underscores. You can see these in Figure 4. For example, *_httppagehome_* takes you to the home page, *_httppagehelp_* to the help page, and so on. In some cases you need to include a collection name. For example, *_httpquery_&c=demo* specifies the search page for the demo collection; for other collections you should replace *demo* by the appropriate collection name.

The definition of the macro called *_content_* is plain html. Any standard html code may be placed within a macro definition. However, the special characters '{', '}', '\', and '_' must be escaped with a backslash to prevent them from being processed by the macro language interpreter.

Note that the *_content_* macro definition does not contain any html header or footer. If you want to change the header or footer of your home page, you should define *_header_* and/or *_footer_* macros, adding them to the *yourhome.dm* file in the form

```

_macroname_ {
...
}

```

For example, the squirly green bar down the left-hand side of Greenstone pages is defined in the `_header_` macro, and making this macro null will remove it, as indicated at the end of Figure 4.

6.2 How to make it work

You have to tell Greenstone about the new home page *yourhome.dm*. The system reads in the macro files that are specified in the main configuration file *main.cfg*, so if you create a new one you must include it there. Name clashes are handled sensibly: the most recent definition takes precedence.

Thus to make the Greenstone digital library software use the home page in Figure 3 instead of the default, first put the *yourhome.dm* file in Figure 4 into the *macros* directory. Then edit the *main.cfg* configuration file to replace *home.dm* with *yourhome.dm* in the list of macro files that are loaded at startup.

6.3 Redirecting a URL to Greenstone

You may want to redirect a more convenient URL to your Greenstone cgi program. For example, on our system the URL *http://nzdl.org* (which is shorthand for *http://nzdl.org/index.html*) is redirected to *http://nzdl.org/cgi-bin/library*. The Apache webserver accomplishes this with the *Redirect* directive. Along with other directives, this goes into the *C:\Program Files\Apache Group\Apache\conf\httpd.conf* configuration file. To redirect the URL *http://www.yourserver.com* to *http://www.yourserver.com/cgi-bin/library*, put this line into *httpd.conf*:

```
Redirect /index.html http://www.yourserver.com/cgi-bin/library
```

Then you will reach your digital library system directly from the URL *http://www.yourserver.com*. Instead, if you wanted a URL like *http://www.yourserver.com/greenstone* to be redirected to *http://www.yourserver.com/cgi-bin/library*, include in the *httpd.conf* file

```
Redirect /greenstone http://www.yourserver.com/cgi-bin/library
```

If your computer doesn't have a domain name (like the "www.yourserver.com" above), just replace *www.yourserver.com* by *localhost* in the lines above. So long as the browser is running on the same machine as the webserver—which it surely is if your computer doesn't have a domain name—this has the same effect as the above redirections.

Instead of putting redirect directives into the file *httpd.conf*, you can equally well put them into a file called *.htaccess* within your server's document root directory. In fact, doing so has two advantages. First, changes to *.htaccess* take effect immediately, whereas you have to restart the Apache webserver to see the effect of changes to *httpd.conf*. Second, on Unix systems you usually have to be logged in as the "root" user to edit *httpd.conf*, whereas you don't to edit *.htaccess*.

Appendix Associated Software

Here is how to obtain the software packages mentioned above.

Apache Webserver

To run any version of Greenstone apart from the Windows Local Library version, you need an external webserver. Many installations, particularly larger ones, will already have a webserver. If you are using Linux, Apache may be on your installation disk but may not have been selected during the installation procedure. The Apache Webserver from www.apache.org is free, and easy to install.

Perl

Greenstone uses the Perl language when building collections. For Windows, Perl is already included in the Greenstone software. Most Unix systems already have Perl installed, but if not, source code and binaries for a wide range of Unix platforms are freely available at www.perl.com. Perl version 5.0 or higher is needed.

GCC

The Unix version of Greenstone compiles under the Gnu C++ compiler, GCC. Greenstone makes extensive use of the C++ standard template library (we've found it to be broken on some older versions of GCC; please tell us if you have STL problems). Note that this version of Greenstone does not compile under GCC 3.0.

GDBM

All versions of Greenstone use the Gnu Database Manager, GDBM. It is supplied with all Windows versions of Greenstone and installed automatically during the installation procedure. Linux systems already have GDBM, so we do not provide it for Linux. Most other Unix systems have it, but if necessary you can download it from www.gnu.org.

Java runtime environment

To use the Greenstone Librarian Interface, you need a suitable version of the Java Runtime Environment. If you don't already have this, a suitable version is included on the CD-ROM, or you can download the latest version from <http://java.sun.com/j2se/downloads.html>. Version 1.4.0 or higher is needed.

Java compiler

To compile the source code of the Greenstone Librarian Interface, you must first install

a Java Development Kit. You can download the J2SE Software Development Kit from <http://java.sun.com/j2se/downloads.html>. Version 1.4.0 or higher is needed.

GNU Free Documentation License

Version 1.2, November 2002

Copyright (C) 2000,2001,2002 Free Software Foundation, Inc. 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant

Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies

you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A.** Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- B.** List on the Title Page, as authors, one or more persons or entities

responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.

- C.** State on the Title page the name of the publisher of the Modified Version, as the publisher.
- D.** Preserve all the copyright notices of the Document.
- E.** Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
- F.** Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
- G.** Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- H.** Include an unaltered copy of this License.
- I.** Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
- J.** Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
- K.** For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- L.** Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- M.** Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
- N.** Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
- O.** Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties--for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements."

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the

Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See <http://www.gnu.org/copyleft/>.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

```
Copyright (c) YEAR YOUR NAME. Permission is granted to copy, distribute and/or
modify this document under the terms of the GNU Free Documentation License, Version
1.2 or any later version published by the Free Software Foundation; with no
Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the
license is included in the section entitled "GNU Free Documentation License".
```

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the "with...Texts." line with this:

```
with the Invariant Sections being LIST THEIR TITLES, with the Front-Cover Texts
being LIST, and with the Back-Cover Texts being LIST.
```

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.